
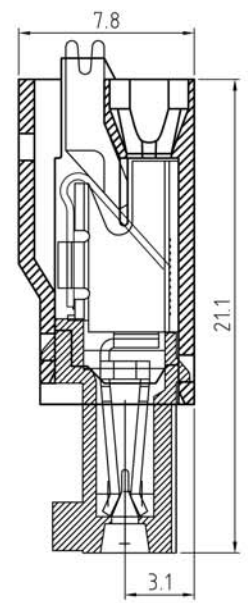
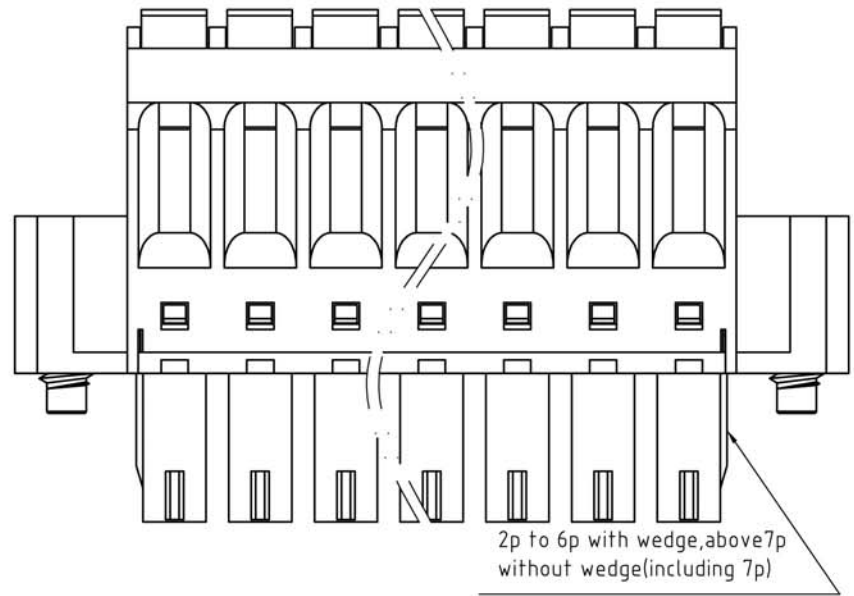


SIGN	DESCRIPTION	DATE	APPROVER

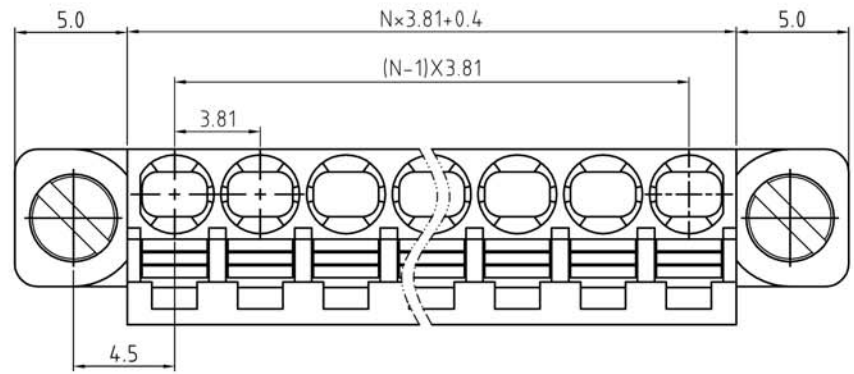

Technical Data:

Material:

- terminal: Copper Alloy with Tin plated
- Spring Clamp: Stainless steel
- Insulator body(housing): Polyamide(UL94V-0)

Electrical

- Voltage rating: 300VAC
- Current rating: 12 Amps/way max
- Contact resistance: 20mΩ(max)
- Withstanding Voltage: 2500VAC(1min) Test time=60sec/1pcs
- Wire range: 16-24AWG

Mechanical:

- Operating temperature: -40°C to +105°C
- Soldering reliability:
  - Test temperature= 250°C±10°C
  - 5 seconds max

Ordering Information:

F73 - K - CXX - 000X0

2 02 ——— 5 Green  
 ~ ~ ~ 6 Blue  
 24 24 ——— 8 Grey  
 A Black

N=Number of contacts

**WELINK** 上海拓尔普电子科技有限公司  
 Welink International Co., LTD.

TOLERANCE X. ±0.50 X.X ±0.30 X.XX ±0.20 X° ±1°	APPROVED:	NAME: F73 - K - pitch3.81mm - series
	CHECKED:	
	DRAWN: Ling Yu 2014.07.12	
	UNITS: mm REV: A	PART NO: F73KCXX000X0
	SCALE: 4 / 1 PAGE: 1 / 1	DWG NO: 9F73KC001A